


MANDRINI DI RIDUZIONE CONO MORSE PER FRESE
MORSE TAPER ADAPTERS FOR THREADED MILLS

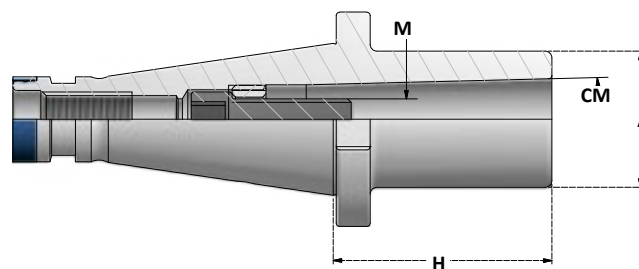

DIMENSIONI
DELL'ATTACCO

SHANK
DIMENSIONS

G6,3 8000 r.p.m.	Articolo	CM	H	A	M
	ISO30.H50.CM1FV	CM1	50	25	M6
	ISO30.H50.CM2FV	CM2	50	32	M10
	ISO30.H78.CM3FV	CM3	78	40	M12

G6,3 8000 r.p.m.	Articolo	CM	H	A	M
	ISO40.H50.CM1FV	CM1	50	25	M6
	ISO40.H50.CM2FV	CM2	50	32	M10
	ISO40.H65.CM3FV	CM3	65	40	M12
	ISO40.H95.CM4FV	CM4	95	48	M16

G6,3 8000 r.p.m.	Articolo	CM	H	A	M
	ISO50.H60.CM1FV	CM1	60	25	M6
	ISO50.H60.CM2FV	CM2	60	32	M10
	ISO50.H115.CM2FV	CM2	115	32	M10
	ISO50.H165.CM2FV	CM2	165	32	M10
	ISO50.H65.CM3FV	CM3	65	40	M12
	ISO50.H165.CM3FV	CM3	165	40	M12
	ISO50.H65.CM4FV	CM4	65	48	M16
	ISO50.H165.CM4FV	CM4	165	48	M16
	ISO50.H120.CM5FV	CM5	120	63	M20

**PER UTENSILI DIN228A
CON FILETTO**

*FOR TOOLS DIN228A
WITH THREAD*

ACCESSORI - ACCESSORIES

