


Maximum Run out of the Internal Dia with respect to the External Taper 0.005 mm

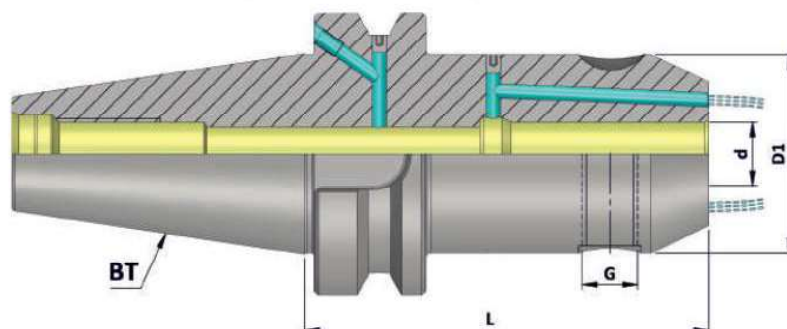

BT (MAS 403)
DIN ISO 7388 - 2
Holders

BT (MAS 403) (WE) (FCC) (AD+B) (JD/JF)

(Balanced to 2.5 G 25000 RPM)

Item Name	Item Code	ISO	d	D1	G	L	Screw Qty.
BT40 WE06 050 FCC AD+B/2.5G 25000 SL	K10102111111263	40	6	25	M6	50	1
BT40 WE06 100 FCC AD+B/2.5G 25000 SL	K10102111148263	40	6	25	M6	100	1
BT40 WE06 160 FCC AD+B/2.5G 25000 SL	K10102111175263	40	6	25	M6	160	1
BT40 WE08 050 FCC AD+B/2.5G 25000 SL	K10102112111263	40	8	28	M8	50	1
BT40 WE08 100 FCC AD+B/2.5G 25000 SL	K10102112148263	40	8	28	M8	100	1
BT40 WE08 160 FCC AD+B/2.5G 25000 SL	K10102112175263	40	8	28	M8	160	1
BT40 WE10 063 FCC AD+B/2.5G 25000 SL	K10102113563263	40	10	35	M10	63	1
BT40 WE10 100 FCC AD+B/2.5G 25000 SL	K10102113148263	40	10	35	M10	100	1
BT40 WE10 160 FCC AD+B/2.5G 25000 SL	K10102113175263	40	10	35	M10	160	1
BT40 WE12 063 FCC AD+B/2.5G 25000 SL	K10102114563263	40	12	42	M12	63	1
BT40 WE12 100 FCC AD+B/2.5G 25000 SL	K10102114148263	40	12	42	M12	100	1
BT40 WE12 160 FCC AD+B/2.5G 25000 SL	K10102114175263	40	12	42	M12	160	1
BT40 WE14 063 FCC AD+B/2.5G 25000 SL	K10102258563263	40	14	44	M12	63	1
BT40 WE14 100 FCC AD+B/2.5G 25000 SL	K10102258148263	40	14	44	M12	100	1
BT40 WE14 160 FCC AD+B/2.5G 25000 SL	K10102258175263	40	14	44	M12	160	1
BT40 WE16 063 FCC AD+B/2.5G 25000 SL	K10102115563263	40	16	48	M14	63	1
BT40 WE16 100 FCC AD+B/2.5G 25000 SL	K10102115148263	40	16	48	M14	100	1
BT40 WE16 160 FCC AD+B/2.5G 25000 SL	K10102115175263	40	16	48	M14	160	1
BT40 WE18 063 FCC AD+B/2.5G 25000 SL	K10102259563263	40	18	50	M14	63	1
BT40 WE18 100 FCC AD+B/2.5G 25000 SL	K10102259148263	40	18	50	M14	100	1
BT40 WE18 160 FCC AD+B/2.5G 25000 SL	K10102259175263	40	18	50	M14	160	1
BT40 WE20 063 FCC AD+B/2.5G 25000 SL	K10102116563263	40	20	52	M16	63	1
BT40 WE20 100 FCC AD+B/2.5G 25000 SL	K10102116148263	40	20	52	M16	100	1
BT40 WE20 160 FCC AD+B/2.5G 25000 SL	K10102116175263	40	20	52	M16	160	1
BT40 WE25 090 FCC AD+B/2.5G 25000 SL	K10102117140263	40	25	65	M18X2	90	2
BT40 WE25 160 FCC AD+B/2.5G 25000 SL	K10102117175263	40	25	65	M18X2	160	2
BT40 WE32 100 FCC AD+B/2.5G 25000 SL	K10102118148263	40	32	72	M20X2	100	2
BT40 WE32 160 FCC AD+B/2.5G 25000 SL	K10102118175263	40	32	72	M20X2	160	2
BT40 WE40 105 FCC AD+B/2.5G 25000 SL	K10102119152263	40	40	80	M20X2	105	2
BT40 WE40 160 FCC AD+B/2.5G 25000 SL	K10102119175263	40	40	80	M20X2	160	2

Note: • All Dimensions are in mm
• These Holders are most suitable for Weldon Type End Mill as per standard DIN 1835 - B