


Maximum Run out of the Internal Taper with respect to the External Taper 0.005 mm

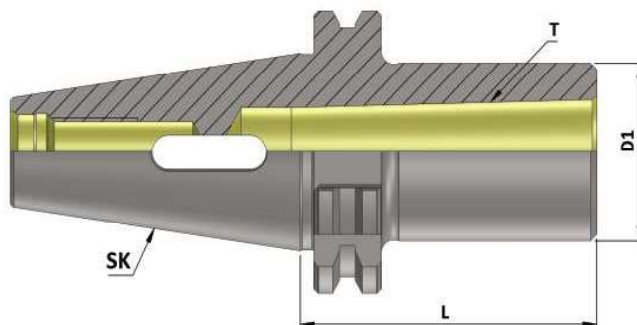

SK (DIN 69871)
DIN ISO 7388 - 1
Holders

SK (DIN 69871) (MTA)

(Balanced to 6.3 G 15000 RPM)

Item Name	Item Code	SK	Morse Taper (T)	D1	L
SK 40 MT01 050 6.3G15000 SL	K10104447111122	40	1	25	50
SK 40 MT01 115 6.3G15000 SL	K10104447159122	40	1	25	115
SK 40 MT02 050 6.3G15000 SL	K10104448111122	40	2	32	50
SK 40 MT02 125 6.3G15000 SL	K10104448164122	40	2	32	125
SK 40 MT03 070 6.3G15000 SL	K10104449125122	40	3	40	70
SK 40 MT03 140 6.3G15000 SL	K10104449169122	40	3	40	140
SK 40 MT04 095 6.3G15000 SL	K10104451145122	40	4	48	95

SK 50 MT01 050 6.3G15000 SL	K10105447111110	50	1	25	50
SK 50 MT01 120 6.3G15000 SL	K10105447162110	50	1	25	120
SK 50 MT02 060 6.3G15000 SL	K10105448117110	50	2	32	60
SK 50 MT02 140 6.3G15000 SL	K10105448169110	50	2	32	140
SK 50 MT03 065 6.3G15000 SL	K10105449123110	50	3	40	65
SK 50 MT03 150 6.3G15000 SL	K10105449173110	50	3	40	150
SK 50 MT04 095 6.3G15000 SL	K10105451145110	50	4	48	95
SK 50 MT04 180 6.3G15000 SL	K10105451178110	50	4	48	180
SK 50 MT05 120 6.3G15000 SL	K10105450162110	50	5	63	120
SK 50 MT05 220 6.3G15000 SL	K10105450180110	50	5	63	220

Note: All Dimensions are in mm