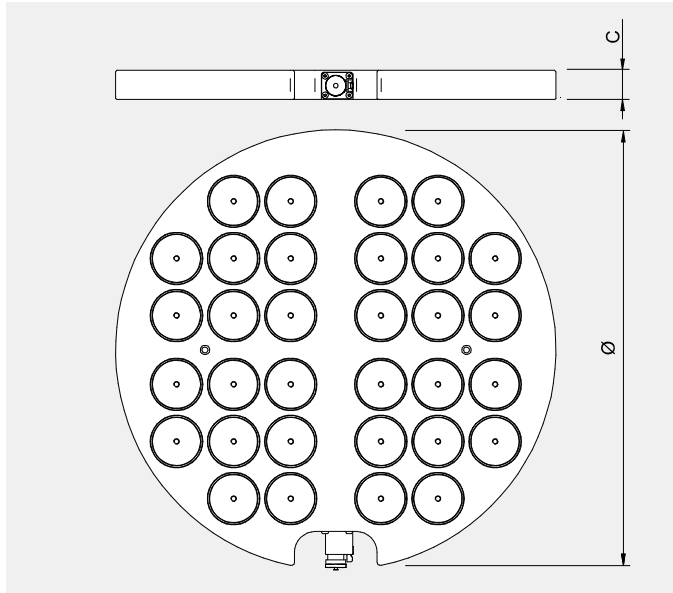


## MILLTEC GRIP ROUND MTG/R

Permanent-electro magnetic plates GRIP auto clamp with round polarity

**Standard supply**

- Permanent-electro magnetic plate with mono-block frame full metallic surface and quick waterproof connector ERGON 5 pin
- GRIP auto clamp feature
- Drawing of machinable areas to drill through holes for installation based on the size of the magnetic plate
- CE declaration of conformity
- Instruction manual on digital support

**Recommended accessories**

- Fix extension Cod. PFR70/20 (pag. 42)
- Moving extension Cod. PFR70/45 (pag. 42)
- Moving extension Cod. RMP70/45 (pag. 42)

Model	Size		Poles	Clamping force	Weight
	Ø diameter	C *			
	mm	mm	n.	kN	Kg
MTG /R 400	400	42	12	77	50
MTG /R 500	500	42	16	103	65
MTG /R 600	640	42	32	205	105
MTG /R 700	740	42	44	282	135
MTG /R 800	800	42	52	324	160
MTG /R 900	900	42	68	437	195
MTG /R 1000	1000	55	80	514	310

\* ± 0,5 mm

Minimum size of work-piece: 160 x 160 mm

Minimum thickness of work-piece: 18 mm

Suitable control unit Cod. ST200FA (pag. 45)

Available also version **MILLTEC BASIC ROUND MTG/R**  
with control unit Cod. ST200SK (pag. 45)